

This data sheet serves as the general characteristics of the product to customer needs. It contains individual specifications, composition and use of this material.

Technical specification:

Board 15MM/black is made by injection molding technology from PP-based plastics. It is lightweight by the addition of a small amount of an inorganic blowing agent. Boards-plates can be joined together using thermal welding. The boards are designed as an auxiliary material for the production of various tanks and similar products.

The surface of the moldings must be smooth, free from defects, bubbles and molded foreign bodies. Smaller traces are allowed after the inflow.

Standard thermoplastics PP and coloring concentrate or UV stabilizer are used for production According to customer requirements.




TECHNICAL DATA

PROPERTIES	TEST METHOD	UNITS	BOARD 15mm
External dimension length x width	Metal scale Accuracy $\pm 0,1$ mm	mm	1000x1000
permissible deviation of external dimensions		mm	± 12
Allowed deflection		mm	15
Thickness	ISO 4593	mm	15
Thickness deviation		mm	± 1
Weight	Calibrated scales with Accuracy ± 1 g	kg	10,5
Weight deviation		g	± 500
Absorbency (100°C/d)	Internal	mg/cm ²	max. 4
Alkaline earth resistance	Internal	Test sample in color embodiment must be undamaged	

Terms of Delivery:

Boards 15MM/black are packed on a pallet in the amount of 50pcs. This packaging unit contains required product information such as manufacturer's label, product name, date of manufacture.

At the request of the customer and by mutual agreement, the manufacturer may modify the packaging and to add some of the data in the labeling.

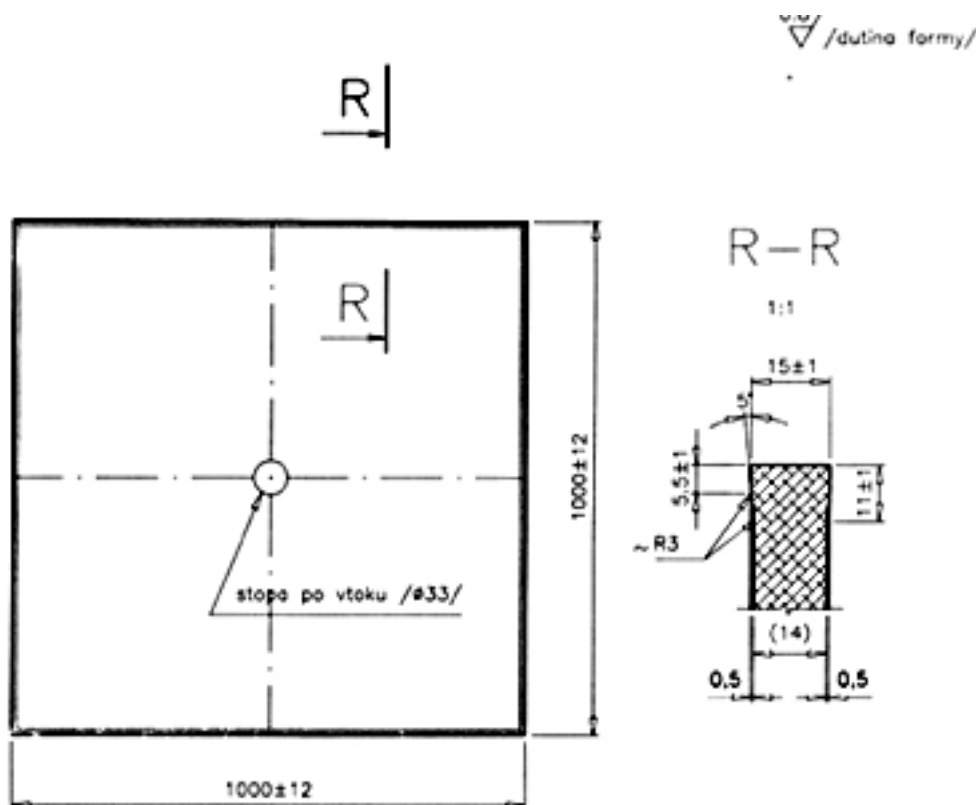

Povolený prieťah: 15 mm
Hmotnosť: 10.5 ± 0.5 kg



TATRAFAN, s.r.o.

Štúrova 101

059 21 Svit

Slovakia

tel.: +421 52 715 2685

fax: +421 52 715 7685

mail: milan.semancik@tatrafan.com